


ELEMENTIS

Application Leaflet

RHEOLATE[®] HX 6010 IF and RHEOLATE[®] HX 6008 IF

High performance Newtonian
NiSAT based rheology
modifiers for waterborne
alkyd based paint

Unique chemistry, sustainable solutions

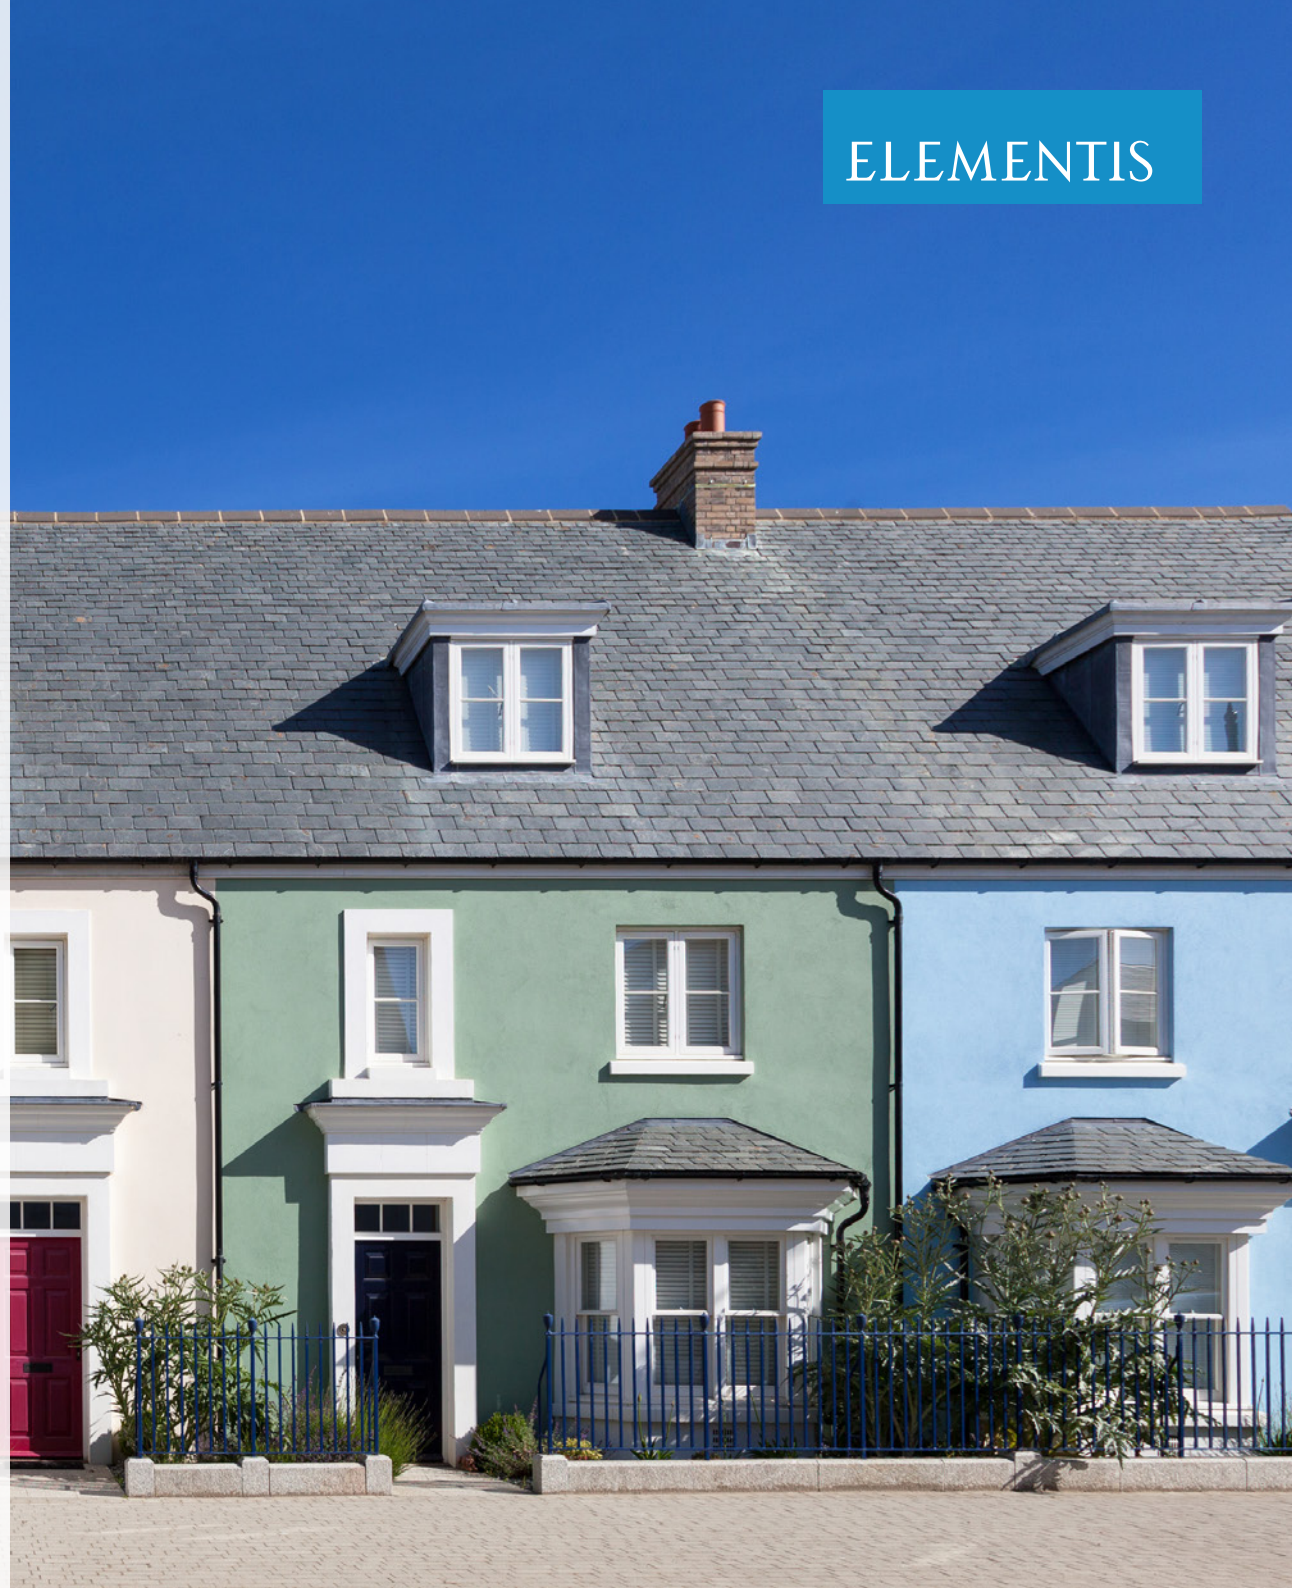

Key Benefits

- Highly effective viscosity build at high-shear rates
- Improved leveling due to Newtonian flow
- Minor influence on secondary paint properties

	RHEOLATE® HX 6010 IF	RHEOLATE® HX 6008 IF
Composition	Polyurethane solution in water	
Appearance	Opaque liquid	
Specific gravity	1.05	
Active solids (by weight), [%]	21	25
Viscosity, [cps]	<3000	1000 - 4000
pH	6	4 - 6
VOC, (ASTM D 6886-03) [%]	<0.01	<0.2

Introduction

Historically, solventborne alkyd paints are widely used in the coating industry for trim paint and exterior woodwork. Waterborne alkyd systems were already introduced 50 years ago to reduce the VOC content and ensure easier water cleanup of tools.

To achieve the desired flow characteristics of solventborne alkyds in waterborne, special thickeners with Newtonian rheological behavior are required. It is important that they do not influence secondary paint properties such as gloss, appearance, workability, and color acceptance of the final coating.

In waterborne alkyds, associative thickeners with Newtonian behavior often exhibit inadequate efficiency, because of reduced interaction between the hydrophobic anchor groups and the resin. In these products, the hydrodynamic volume of active molecules is typically responsible for the viscosity achieved under high shear conditions. As a consequence of the lower tendency to interact, larger quantities of rheological additives are often needed to obtain the required viscosity. Further, often some mid-shear contribution can be observed, which, however, is not desired in all cases.

RHEOLATE® HX 6010 IF and RHEOLATE® HX 6008 IF are ideal candidates for waterborne alkyd systems due to their high efficiency in comparison to traditional NiSAT grades.

RHEOLATE® HX 6010 IF shows a purely Newtonian flow. It mainly builds viscosity at high-shear rates. Only a minor effect on the viscosity at low and mid-shear forces is observed.

Incorporation and levels of use

RHEOLATE® HX 6008 IF and RHEOLATE® HX 6010 IF can be used as delivered or further diluted with water. They can be added at any time during the manufacturing process, however incorporation into the mill base before the letdown is recommended. Both grades can be combined with other associative rheological additives, clay based thickeners or cellulosic thickeners to achieve the desired rheological profile.

It is important to assess the effectiveness of RHEOLATE® HX products in the entire system, as performance might be affected by other raw materials. Further detailed background information on the technology of nonionic synthetic associative thickeners can be found in the Elementis Rheology Handbook.

Products tested


Formulation

TABLE 1: Waterborne PU-alkyd based topcoat

Component	Concentration [%]
Demineralized water	11.25 - X
Defoamer	0.50
Dispersant	1.15
Rheological additive	X
Titanium dioxide	22.65
NuroPac® PU-580	60.10
Siccative	1.15
Slip-agent	0.05
Leveling/flow additive	0.15
Total	100.00

X is variable in accordance with individual concentration.

FIGURE 1

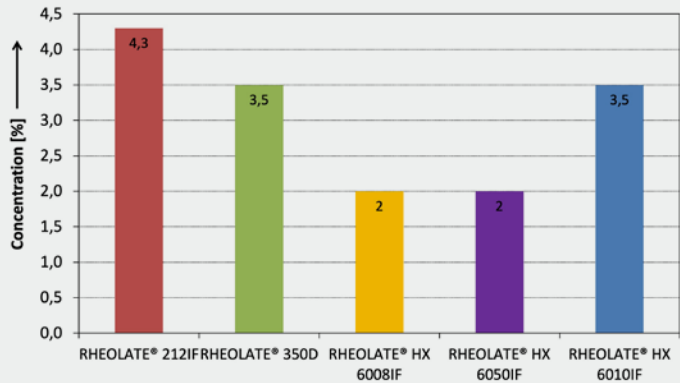

Thickener loading


The **FIGURE 1** shows the amount of thickener required to reach a high-shear/ICI viscosity of 4.0 Poise.

RHEOLATE® HX 6010 IF and RHEOLATE® 350 D require lower loading levels than RHEOLATE® 212 IF to reach the same high-shear viscosity. The lowest addition levels are observed with RHEOLATE® HX 6008 IF.

Rheological character

The **FIGURE 2** shows the flow characteristics of the waterborne PU-alkyd based topcoat, formulated with the amount of thickener necessary to achieve equal high-shear viscosities at 10000 s⁻¹ (ICI). The small inset shows the ICI viscosity and the corresponding KU contribution for the individual thickeners.

FIGURE 2

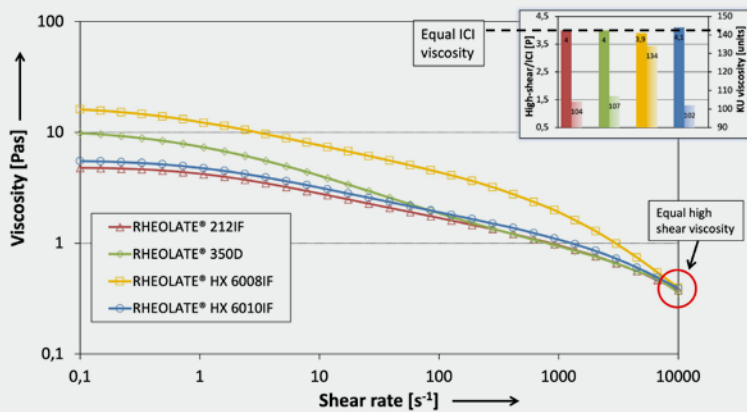

RHEOLATE® HX 6010 IF and RHEOLATE® 212 IF demonstrate the most Newtonian flow. The sample containing RHEOLATE® 350 D displays equal viscosity values at high and mid-shear rates, but decidedly higher viscosity at lower shear. RHEOLATE® HX 6008 IF provides the highest viscosity at all tested shear rates, which is confirmed by the high KU viscosity.

FIGURE 3


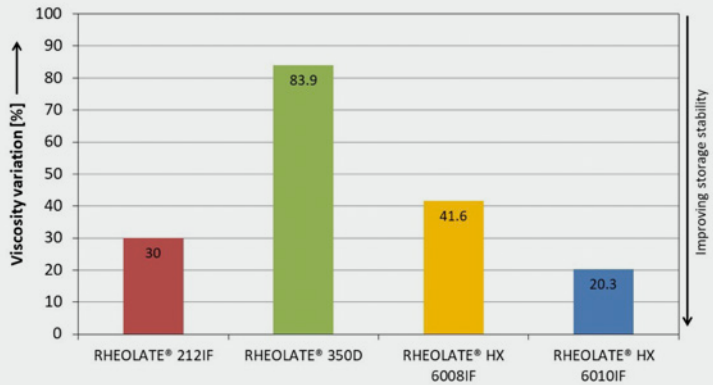


FIGURE 4

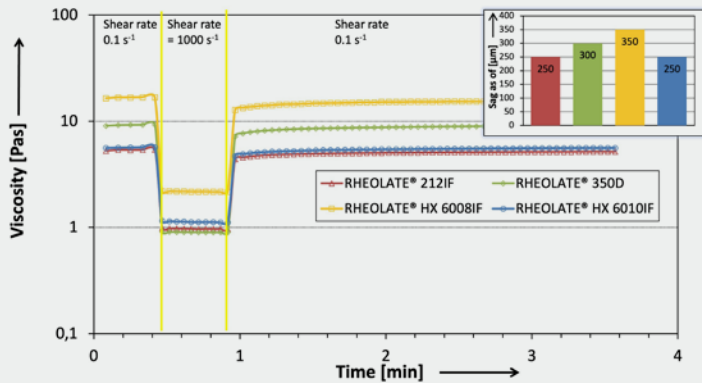

Viscosity stability

The **FIGURE 3** displays the viscosity change measured at a shear rate of 0.1 s⁻¹ after 3 weeks of storage at an elevated temperature of 50 °C. The lower the bar, the better the performance.


The sample formulated with RHEOLATE® HX 6010 IF shows the least viscosity variation after storage at elevated temperature.

Viscosity recovery in relation to sag stability

The **FIGURE 4** demonstrates the recovery behavior of the test paints after the removal of high-shear forces. The sag resistance tested with an application blade is shown in the right corner.

All samples display equal viscosity recovery times. The sample containing RHEOLATE® HX 6008 IF displays the highest viscosity of all tested samples immediately after the removal of shear. This is followed by RHEOLATE® 350 D. RHEOLATE® HX 6010 IF and RHEOLATE® 212 IF give the lowest viscosities at low-shear. Sag resistance, measured as maximum layer thickness after blade application directly correlates with the viscosity.

FIGURE 5

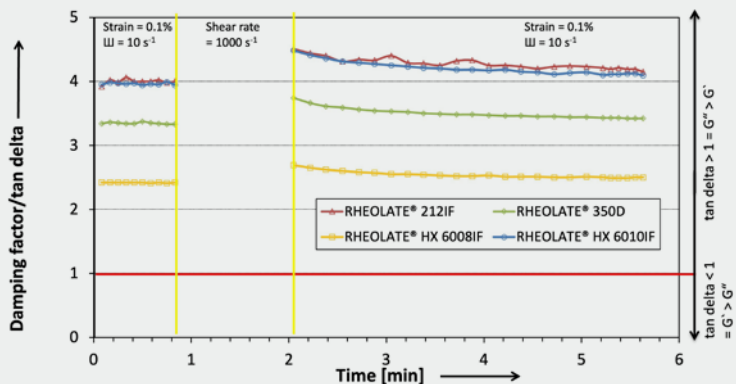

Viscoelasticity


The **FIGURE 5** shows the viscoelastic properties determined in an oscillatory test before and after the influence of high-shear. Damping factor (tan delta) values of above 1 indicate predominantly fluid characteristics; values of below 1 indicate predominantly elastic properties.

All tested samples demonstrate tan delta values of above 1 which indicates a dominant fluid character. Material formulated with RHEOLATE® HX 6010 IF and RHEOLATE® 212 IF show the highest tan delta values indicating the strongest fluid behavior of all tested samples.

Leveling in context with viscoelasticity

The **FIGURE 6** shows the leveling behavior with blade and brush application. The values are compared to the damping factors/tan delta values shown in the graph before.

FIGURE 6

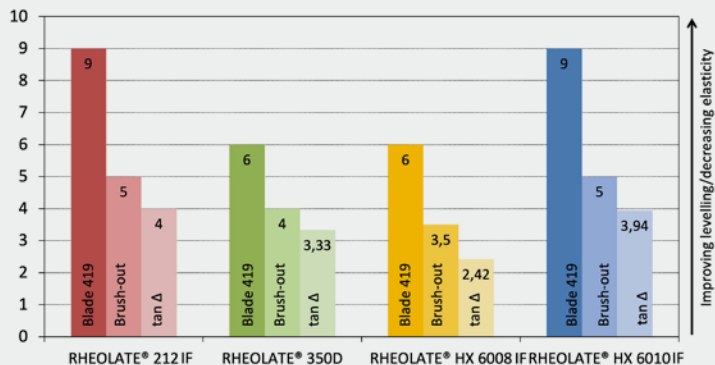

Both grades, RHEOLATE® HX 6010 IF and RHEOLATE® 212 IF, provide the most Newtonian flow character and display the best leveling which correlates to the largest tan delta values. RHEOLATE® 350 D and RHEOLATE® HX 6008 IF, are less Newtonian, and do not level as well.

As previously mentioned, all tested samples have tan delta values higher than 1 indicating dominant fluid characteristics. It can clearly be seen that higher tan delta levels indicate improved leveling.

Application properties

The **TABLE 2** shows application data such as gloss, surface appearance, general workability and behavior upon tinting.

TABLE 2

Rheological additive	Gloss at 60° [units]	Surface defects/cissing	Block resistance	Color acceptance ΔE
RHEOLATE® 212IF	86	5	5	0.40
RHEOLATE® 350 D	89	5	4	0.20
RHEOLATE® HX 6008IF	87	5	5	0.21
RHEOLATE® HX 6010IF	87	5	5	0.34

All samples tested demonstrate almost equal gloss values and block resistance. No coating appearance issues, such as surface defects or cissing are detected. After tinting, only minor differences in ΔE values tinting were found, all within an acceptable range.

None of the tested rheology modifiers negatively affects any of the tested properties of the final coating.

Conclusion

RHEOLATE® HX 6010 IF provides outstanding high-shear viscosity build with only a minor effect on mid-shear viscosity. It is more efficient in use than the traditional Newtonian NISAT grades. RHEOLATE® HX 6010 IF gives excellent storage stability and application properties. It shows great leveling properties as indicated by the viscoelastic data.

If moderate mid-shear thickening together with a strong Newtonian character is required, RHEOLATE® HX 6010 IF is the most efficient option. RHEOLATE® HX 6008 IF is the most efficient thickener of all four tested, but also has the highest KU contribution. RHEOLATE® HX 6008 IF provides higher sag resistance than RHEOLATE® HX 6010 IF when used as a stand-alone thickener.

Traditional grades such as RHEOLATE® 212 IF and RHEOLATE® 350 D are less efficient in use: they need a higher loading level to reach the same high-shear viscosity. At this higher loading level RHEOLATE® 212 IF exhibits the same Newtonian character as RHEOLATE® HX 6010 IF. RHEOLATE® 350 D imparts strong high shear thickening with less influence on KU build than the RHEOLATE® HX 6008 IF.

APPENDIX

Test methods:

- High-shear/ICI (at 10000 s⁻¹) viscosity was measured in accordance with the Elementis standard methods of testing at a temperature of 23 °C, 24 hours after manufacturing the adhesives.
- The rheograms and viscoelasticity/oscillation curves were determined using the Anton-Paar MCR 301 rheometer, equipped with measuring geometry PP 50, at a gap width of 1 mm and at a temperature of 23 °C.
- Sag was tested using a test blade with applicable layer thicknesses of 100 - 500 µm. The displayed values indicate the maximum applicable layer thickness without runners.
- Leveling was determined using test blade 419 (measuring range from 0 to 10). Brush-out leveling was tested by brushing out 25 g of paint equally on leneta chart (Measuring range: 0 = poor/5 = excellent). In both cases, the higher the mentioned number the better the performance.
- Gloss was determined using the BYK/Gardner haze/gloss tester at a measuring angle of 60 °C.
- Surface defects/cissing and block resistance was measured visually on a scale from 0 to 5; the higher the number the better the performance.
- Color acceptance was measured as ΔE values after equipping the individual paints with 2% of blue universal colorant VOC-free, PEG containing Colortrend 807-7055 EXE ES blue.

Abbreviations used:

- NiSAT stands for “Nonionic Synthetic Associative Thickener”.

NOTE:

The information herein is currently believed to be accurate. We do not guarantee its accuracy. Purchasers shall not rely on statements herein when purchasing any products. Purchasers should make their own investigations to determine if such products are suitable for a particular use. The products discussed are sold without warranty, express or implied, including a warranty of merchantability and fitness for use. Purchasers will be subject to a separate agreement which will not incorporate this document.

© Copyright 2024, Elementis Specialties, Inc. All rights reserved. Copying and/or downloading of this document or information therein for republication is not allowed unless prior written agreement is obtained from Elementis Specialties, Inc.

April 2024

For more details
please contact:

North America

Elementis
469 Old Trenton Road
East Windsor,
NJ 08512, USA
Tel: +1 609 443 2500

Europe

Elementis UK Ltd c/o
Porto Business Plaza
Santos Pousada Street, 290
4300-189, Porto, Portugal

Asia

Deuchem (Shanghai) Chemical
Co., Ltd.
99, Lianyang Road
Songjiang Industrial Zone
Shanghai, China 201613
Tel: +86 21 577 40348

elementis.com



Unique chemistry,
sustainable solutions